

Economic Dispatch in Unbalanced Distribution Networks via Semidefinite Relaxation

Emiliano Dall'Anese, *Member, IEEE*, Georgios B. Giannakis, *Fellow, IEEE*,
and Bruce F. Wollenberg, *Life Fellow, IEEE*

Abstract—The economic dispatch problem is considered for unbalanced three-phase power distribution networks entailing both non-deferrable and elastic loads, and distributed generation (DG) units. The objective is to minimize the costs of power drawn from the main grid and supplied by the DG units over a given time horizon, while meeting the overall load demand and effecting voltage regulation. Similar to optimal power flow counterparts for balanced systems, the resultant optimization problem is nonconvex. Nevertheless, a semidefinite programming (SDP) relaxation technique is advocated to obtain a (relaxed) convex problem solvable in polynomial-time complexity. To promote a reliable yet efficient feeder operation, SDP-compliant constraints on line and neutral current magnitudes are accommodated in the optimization formulated, along with constraints on the power factor at the substation and at nodes equipped with capacitor banks. Tests on the IEEE 13-node radial feeder demonstrate the ability of the proposed method to attain the *globally* optimal solution of the original nonconvex problem.

Index Terms—Unbalanced distribution systems, economic dispatch, power factor, voltage regulation, elastic loads.

I. INTRODUCTION

The advent of distributed energy resources, along with the rapid proliferation of controllable loads such as, e.g., plug-in hybrid electric vehicles (PHEVs), call for innovative energy management methodologies to ensure highly efficient operation of distribution networks, effect voltage regulation, and facilitate emergency response [1]. Toward these goals, variants of the optimal power flow (OPF) problem have been devised with the objective of optimizing the power supplied by distributed generation (DG) units as well as by the utility at the substation, subject to electrical network constraints on powers and voltages, and the expected load profile [2].

These approaches however, are deemed challenging because they require solving nonconvex problems. Non-convexity stems from the nonlinear relationship between voltages and the apparent powers demanded at the loads. Furthermore, the high resistance-reactance ratio in conventional distribution lines severely challenges the convergence of Newton-Raphson iterations, which have been traditionally employed for solving nonconvex OPF problems in transmission networks [3], [4]. This has motivated the adoption of forward/backward sweeping methods [5], which enable computationally-efficient load flow analysis, but are not suitable for optimization purposes,

fuzzy dynamic programming [6], particle swarm optimization [7], sequential quadratic optimization [8], and steepest descent-based methods [9]. However, these approaches generally return sub-optimal load flow solutions, and may be computationally cumbersome. To alleviate these concerns, the semidefinite programming (SDP) reformulation of [10] and [11] was recently extended to *balanced* distribution networks in [12], and conditions ensuring global optimality of the obtained solution were derived.

Three-phase distribution feeders however, are inherently *unbalanced* because *i)* a large number of unequal single-phase loads must be served, and *ii)* non-equilateral conductor spacings of three-phase line segments are involved [13]. As a consequence, optimization approaches can not rely on single-phase equivalent models (as in, e.g. [12], [9]). For the unbalanced setup, an OPF framework was proposed in [14], where commercial solvers of nonlinear programs were used, and in [15], where Newton methods were utilized in conjunction with OpenDSS load flow solvers. A model based on sequence components was adopted in [16], and the Newton-Raphson algorithm was used. However, since these methods are inherently related to gradient descent solvers of nonconvex programs, they inherit the limitations of being sensitive to initialization, and do not guarantee global optimality of their solutions.

The main contribution of the present paper consists in permeating the benefits of SDP relaxation techniques to the economic dispatch problem for *unbalanced* three-phase power distribution systems. This powerful optimization tool not only offers the potential of finding the *globally* optimal solution of the original nonconvex problem in *polynomial-time* complexity [17], but also facilitates the introduction of thermal and quality-of-power constraints without exacerbating the problem complexity. The focus here is on the case where the costs of power provided by the utility company and supplied by the DG units are known in advance over a given time horizon. Then, the goal is to minimize the overall energy cost so that both non-deferrable and elastic load demands are met, and the node voltages stay within prescribed limits. Furthermore, constraints on line and neutral current magnitudes, as well as on the power factor at substation and nodes equipped with capacitor banks are accommodated in the optimization problem in order to improve reliability and efficiency of the distribution feeder.

Notation: Upper (lower) boldface letters will be used for matrices (column vectors); $(\cdot)^T$ for transposition; $(\cdot)^*$ complex-conjugate; and, $(\cdot)^H$ complex-conjugate transposition; $\Re\{\cdot\}$ denotes the real part, and $\Im\{\cdot\}$ the imaginary part;

Submitted: July 3, 2012. The authors are with the Department of Electrical and Computer Engineering, University of Minnesota, 200 Union Street SE, Minneapolis, MN 55455, USA. E-mails: {emiliano, georgios, wollenbe}@umn.edu.

$j = \sqrt{-1}$ represents the imaginary unit. $\text{Tr}(\cdot)$ denotes the matrix trace; $\text{rank}(\cdot)$ the matrix rank; $\circ$ the Hadamard product; and, $|\cdot|$ denotes the magnitude of a number or the cardinality of a set. Given a vector $\mathbf{v}$ and matrix $\mathbf{V}$, $[\mathbf{v}]_{\mathcal{P}}$ denotes a $|\mathcal{P}| \times 1$ sub-vector containing the entries of $\mathbf{v}$ indexed by the set $\mathcal{P}$, and $[\mathbf{V}]_{\mathcal{P}_1, \mathcal{P}_2}$ the $|\mathcal{P}_1| \times |\mathcal{P}_2|$ sub-matrix with row and column indexes described by $\mathcal{P}_1$ and $\mathcal{P}_2$. Finally, $\mathbf{0}_{M \times N}$ and $\mathbf{1}_{M \times N}$ denotes $M \times N$ matrices with all zeroes and ones, respectively.

II. MODELING AND PROBLEM FORMULATION

Consider a radial distribution feeder comprising N nodes collected in the set $\mathcal{N} := \{1, \dots, N\}$, and overhead or underground lines represented by the set of edges $\mathcal{E} := \{(m, n)\} \subset (\mathcal{N} \cup \{0\}) \times (\mathcal{N} \cup \{0\})$, where the additional node 0 corresponds to the point of common coupling (PCC). The feeder operation is to be optimized over a given time interval $\mathcal{I} := \{1, 2, \dots, T\}$, where each time slot can represent e.g., ten minutes or fifteen minutes, one hour, etc, depending on the specific short-, medium-, or long-range scheduling horizon [14].

The backbone of the feeder generally consists of three-phase lines, with two- and single-phase connections at times present on laterals and sub-laterals. Let $\mathcal{P}_{mn} \subseteq \{a, b, c\}$ and $\mathcal{P}_n \subseteq \{a, b, c\}$ denote the phase of line $(m, n) \in \mathcal{E}$ and node $n \in \mathcal{N}$, respectively. Further, let $V_{n,t}^\phi \in \mathbb{C}$ and $I_{n,t}^\phi \in \mathbb{C}$ be the complex line-to-ground voltage at node $n \in \mathcal{N}$ and time slot t of phase $\phi \in \mathcal{P}_n$, and the current injected at the same node, phase, and time. As usual, the voltages $\mathbf{v}_{0,t} := [V_{0,t}^a, V_{0,t}^b, V_{0,t}^c]^T$ at the PCC are assumed to be known [13].

Lines $(m, n) \in \mathcal{E}$ are modeled as π -equivalent components, and the $|\mathcal{P}_{mn}| \times |\mathcal{P}_{mn}|$ phase impedance and shunt admittance matrices are denoted as $\mathbf{Z}_{mn} \in \mathbb{C}^{|\mathcal{P}_{mn}| \times |\mathcal{P}_{mn}|}$ and $\mathbf{Y}_{mn}^{(s)} \in \mathbb{C}^{|\mathcal{P}_{mn}| \times |\mathcal{P}_{mn}|}$, respectively. If four-wire grounded wye lines or lines with multi-grounded neutrals are present, matrices $\mathbf{Z}_{mn}$ and $\mathbf{Y}_{mn}^{(s)}$ can be obtained from the higher-dimensional “primitive” matrices via Kron reduction [13, Ch. 6]. Using the π -equivalent model, it follows from Kirchhoff’s current law that the current I_n^ϕ can be expressed as [13]

$$I_{n,t}^\phi = \sum_{m \in \mathcal{N}_n} \left[\left(\frac{1}{2} \mathbf{Y}_{mn}^{(s)} + \mathbf{Z}_{mn}^{-1} \right) [\mathbf{v}_{n,t}]_{\mathcal{P}_{mn}} - \mathbf{Z}_{mn}^{-1} [\mathbf{v}_{m,t}]_{\mathcal{P}_{mn}} \right]_{\{\phi\}} \quad (1)$$

where $\mathcal{N}_n \subset \mathcal{N}$ is the set of nodes linked to n through a transmission line, and $\mathbf{v}_{n,t} \in \mathbb{C}^{|\mathcal{P}_n|}$ denotes the column vector collecting the voltages at node n and time slot t . Three- or single-phase transformers (if any) are modeled as series components with transmission parameters that depend on the connection type [13, Ch. 8], [14].

Per phase $\phi \in \mathcal{P}_n$ and node $n \in \mathcal{N}$, the following two classes of loads are considered.

- A base *non-deferrable* load with active and reactive powers demanded at time t denoted by $P_{L,n,t}^\phi$ and $Q_{L,n,t}^\phi$, respectively.
- A set $\mathcal{D}_n^\phi$ of *controllable* (elastic) loads, each with a prescribed energy requirement $E_{d,n}^\phi$ to be completed over a given interval $\mathcal{I}_{d,n}^\phi := [s_{d,n}^\phi, f_{d,n}^\phi] \subseteq \mathcal{I}$, with $s_{d,n}^\phi$ representing the starting time, and $f_{d,n}^\phi$ the termination

slot; that is, $\sum_{t \in \mathcal{I}_{d,n}^\phi} \bar{P}_{d,n,t}^\phi \Delta_t = E_{d,n}^\phi$, with $\bar{P}_{d,n,t}^\phi$ the amount of active power supplied to the controllable load $d \in \mathcal{D}_n^\phi$ at time slot t , and $\Delta_t > 0$ the duration of the time slot.

An example of controllable load is PHEVs, whose charging process can be shifted from hours with high price of electricity [18], and high load conditions of the distribution network [8], [19], to off-peak hours. In this case, users specify the time when PHEVs will be plugged in, and the time by which the charging has to be completed [8], [18].

In distribution feeders, capacitor banks are mounted at some selected nodes to provide reactive power support, aid voltage regulation, and correct the load power factor (PF). As usual, capacitors can be modeled as wye or delta loads with constant susceptance [14], [13, Ch. 9]. Therefore, with $y_{C,n}^\phi$ denoting the susceptance of a capacitor connected at node n and phase ϕ , the reactive power $Q_{C,n,t}^\phi$ provided by the capacitor at time t is given by $Q_{C,n,t}^\phi = y_{C,n}^\phi |V_{n,t}^\phi|^2$. To satisfy the load demand, DG units such as, e.g. diesel generators and fuel cells can be employed to complement the power drawn from the main distribution grid. Then, suppose that S DG units are located at nodes $\mathcal{S} \subset \mathcal{N}$, and let $P_{G,s,t}^\phi$ and $Q_{G,s,t}^\phi$ denote the active and reactive powers supplied by unit $s \in \mathcal{S}$.

The focus is on the case where the costs of power provided by the utility company $P_{0,t}^\phi := \Re\{V_{0,t}^\phi (I_{0,t}^\phi)^*\}$, $\phi = a, b, c$, and supplied or consumed by the DG units are determined in advance for the period $\mathcal{I}$. Let $\{\kappa_{0,t}\}$ denote the former, and $\{c_{s,t}\}$ the latter. Then, the goal is to minimize the overall cost of power purchased from the main grid and generated within the feeder (economic dispatch), so that the total load demand is met, and the node voltages stay within prescribed limits; that is, the following problem is to be solved, where $\mathcal{V}^{(1)} := \{\{I_{0,t}^\phi\}_{\forall \phi, t}, \{V_{n,t}^\phi, I_{n,t}^\phi, P_{G,n,t}^\phi, Q_{G,n,t}^\phi\}_{\forall \phi, n, t}\}$ and $\mathcal{V}_d := \{\{\bar{P}_{d,n,t}^\phi\}_{\forall \phi, n, t}\}$ collect the optimization variables:

$$(P1) \min_{\mathcal{V}^{(1)}_{\mathcal{V}_d}} \sum_{t \in \mathcal{I}} \left(\kappa_{0,t} \sum_{\phi \in \mathcal{P}_0} P_{0,t}^\phi + \sum_{s \in \mathcal{S}} c_{s,t} \sum_{\phi \in \mathcal{P}_s} P_{G,s,t}^\phi \right) \quad (2a)$$

$$\text{s.t. } V_{s,t}^\phi (I_{s,t}^\phi)^* = P_{G,s,t}^\phi - P_{L,s,t}^\phi - \sum_{d \in \mathcal{D}_s^\phi} \bar{P}_{d,s,t}^\phi + jQ_{G,s,t}^\phi - jQ_{L,s,t}^\phi, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_s, s \in \mathcal{S} \quad (2b)$$

$$V_{n,t}^\phi (I_{n,t}^\phi)^* = -P_{L,n,t}^\phi - \sum_{d \in \mathcal{D}_n^\phi} \bar{P}_{d,n,t}^\phi - jQ_{L,n,t}^\phi + jy_{C,n}^\phi |V_{n,t}^\phi|^2, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_n, n \in \mathcal{N} \setminus \mathcal{S} \quad (2c)$$

$$\sum_{t \in \mathcal{I}_{d,n}^\phi} \bar{P}_{d,n,t}^\phi \Delta_t = E_{d,n}^\phi, \quad \forall d \in \mathcal{D}_n^\phi, \phi \in \mathcal{P}_n, n \in \mathcal{N} \quad (2d)$$

$$0 \leq \bar{P}_{d,n,t}^\phi \leq \bar{P}_{d,n}^{\max}, \quad \forall t \in \mathcal{I}, d \in \mathcal{D}_n^\phi, n \in \mathcal{N} \quad (2e)$$

$$V_{n,t}^{\min} \leq |V_{n,t}^\phi| \leq V_{n,t}^{\max}, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_n, n \in \mathcal{N} \quad (2f)$$

$$P_{G,s}^{\min} \leq P_{G,s,t}^\phi \leq P_{G,s}^{\max}, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_s, s \in \mathcal{S} \quad (2g)$$

$$Q_{G,s}^{\min} \leq Q_{G,s,t}^\phi \leq Q_{G,s}^{\max}, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_n, n \in \mathcal{N} \quad (2h)$$

where $P_{G,s}^{\min}, P_{G,s}^{\max}, Q_{G,s}^{\min}, Q_{G,s}^{\max}$ capture physical and operational constraints of the DG units, and $V_n^{\min}$ and $V_n^{\max}$ are

given minimum and maximum utilization and service voltages. Finally, $\bar{P}_{d,n}^{\max}$ represents a possible cap for $\bar{P}_{d,n}^{\phi}$. If capacitor banks are not present, (2c) should be modified to $V_{n,t}^{\phi}(I_{n,t}^{\phi})^* = -P_{L,n,t}^{\phi} - jQ_{L,n,t}^{\phi}$. Recall that the voltages at the PCC are assumed known. However, if needed, this assumption can be relaxed, and (P1) can be appropriately re-stated.

Unfortunately, (P1) is a nonlinear *nonconvex* problem due to the load flow equations (2b)-(2c) as well as the voltage constraints (2f). In the next section, an equivalent reformulation of (P1) will be derived, and its solution will be tackled by employing an SDP relaxation technique.

III. RELAXED SEMI-DEFINITE PROGRAMMING

Consider first a distribution feeder with only three-phase lines and nodes; that is, $|\mathcal{P}_n| = 3$ for all $n \in \mathcal{N}$, and $|\mathcal{P}_{nl}| = 3$ for all lines $(n, l) \in \mathcal{E}$. Let $\mathbf{Y} \in \mathbb{C}^{3(N+1) \times 3(N+1)}$ be a symmetric matrix defined as [cf. (1)]

$$[\mathbf{Y}]_{\mathcal{P}_n, \mathcal{P}_m} := \begin{cases} \sum_{m \in \mathcal{N}_m} \left(\frac{1}{2} \mathbf{Y}_{mn}^{(s)} + \mathbf{Z}_{mn}^{-1} \right), & \text{if } m = n \\ -\mathbf{Z}_{mn}^{-1}, & \text{if } (m, n) \in \mathcal{E} \\ \mathbf{0}_{3 \times 3}, & \text{otherwise} \end{cases}$$

and define the $3(N+1) \times 1$ vectors $\mathbf{v}_t := [\mathbf{v}_{0,t}^T, \dots, \mathbf{v}_{N,t}^T]^T$ and $\mathbf{i}_t := [\mathbf{i}_{0,t}^T, \dots, \mathbf{i}_{N,t}^T]^T$, with $\mathbf{i}_{n,t} := [I_{n,t}^a, I_{n,t}^b, I_{n,t}^c]^T$. Then, (1) can be re-written in vector-matrix form as $\mathbf{i}_t = \mathbf{Y} \mathbf{v}_t$.

Since the PCC voltages $\{\mathbf{v}_{0,t}\}$ are known, re-write the vector of complex voltages as $\mathbf{v}_t = \mathbf{a}_{0,t} \circ \mathbf{x}_t$, with $\mathbf{x}_t := [\mathbf{1}_3^T, \mathbf{v}_{1,t}^T, \dots, \mathbf{v}_{N,t}^T]^T$ and $\mathbf{a}_{0,t} := [\mathbf{v}_{0,t}^T, \mathbf{1}_{|\mathcal{P}_1|}^T, \dots, \mathbf{1}_{|\mathcal{P}_N|}^T]^T$, for all $t \in \mathcal{I}$. Then, consider expressing the active and reactive powers injected at each node at time t , as well as the voltage magnitudes as linear functions of the outer-product matrix $\mathbf{X}_t := \mathbf{x}_t \mathbf{x}_t^H$. To this end, define the following admittance-related matrix per node n and phase ϕ

$$\mathbf{Y}_n^{\phi} := \bar{\mathbf{e}}_n^{\phi} (\bar{\mathbf{e}}_n^{\phi})^T \mathbf{Y} \quad (3)$$

where $\bar{\mathbf{e}}_n^{\phi} := [\mathbf{0}_{|\mathcal{P}_0|}^T, \dots, \mathbf{0}_{|\mathcal{P}_{n-1}|}^T, \mathbf{e}^{\phi, \mathcal{T}}, \mathbf{0}_{|\mathcal{P}_{n+1}|}^T, \dots, \mathbf{0}_{|\mathcal{P}_N|}^T]^T$, and $\{\mathbf{e}^{\phi}\}_{\phi \in \{a,b,c\}}$ denotes the canonical basis of $\mathbb{R}^3$. Denote for future use the Hermitian matrices

$$\Phi_{P,n,t}^{\phi} := \frac{1}{2} \mathbf{D}_{0,t}^{\mathcal{H}} (\mathbf{Y}_n^{\phi} + (\mathbf{Y}_n^{\phi})^{\mathcal{H}}) \mathbf{D}_{0,t} \quad (4a)$$

$$\Phi_{Q,n,t}^{\phi} := \frac{j}{2} \mathbf{D}_{0,t}^{\mathcal{H}} (\mathbf{Y}_n^{\phi} - (\mathbf{Y}_n^{\phi})^{\mathcal{H}}) \mathbf{D}_{0,t} \quad (4b)$$

$$\Phi_{V,n,t}^{\phi} := \mathbf{D}_{0,t}^{\mathcal{H}} \bar{\mathbf{e}}_n^{\phi} (\bar{\mathbf{e}}_n^{\phi})^T \mathbf{D}_{0,t} \quad (4c)$$

with $\mathbf{D}_{0,t} := \text{diag}(\mathbf{a}_{0,t})$. Using (4), a linear model in $\mathbf{X}_t$ (and therefore in $\mathbf{V}_t := \mathbf{v}_t \mathbf{v}_t^H$) is established in the following lemma (see also [20] and [11]).

Lemma 1: Apparent powers and voltage magnitudes are linearly related with $\{\mathbf{X}_t\}$ as [cf. (4)]

$$\text{Tr}(\Phi_{P,n,t}^{\phi} \mathbf{X}_t) = P_{G,n,t}^{\phi} - P_{L,n,t}^{\phi} - \sum_{d \in \mathcal{D}_s^{\phi}} \bar{P}_{d,s,t}^{\phi} \quad (5a)$$

$$\text{Tr}(\Phi_{Q,n,t}^{\phi} \mathbf{X}_t) = Q_{G,n,t}^{\phi} - Q_{L,n,t}^{\phi} + y_{C,n}^{\phi} \text{Tr}(\Phi_{V,n,t}^{\phi} \mathbf{X}_t) \quad (5b)$$

$$\text{Tr}(\Phi_{V,n,t}^{\phi} \mathbf{X}_t) = |V_{n,t}^{\phi}|^2 \quad (5c)$$

with $P_{G,n,t}^{\phi} = Q_{G,n,t}^{\phi} = 0$ for $n \in \mathcal{N} \setminus \mathcal{S}$, and $y_{C,n}^{\phi} = 0$ if capacitor banks are not present at node n .

Proof. See the Appendix. $\square$

Using (5a)–(5c), problem (P1) is *equivalently* reformulated as follows:

$$(P2) \quad \min_{\{\mathbf{X}_t\}, \mathcal{V}_d} \sum_{t \in \mathcal{I}} \kappa_{0,t} \sum_{\phi \in \mathcal{P}_0} \text{Tr}(\Phi_{P,0,t}^{\phi} \mathbf{X}_t) + \sum_{t \in \mathcal{I}} \sum_{s \in \mathcal{S}} c_{s,t} \sum_{\phi \in \mathcal{P}_s} \text{Tr}(\Phi_{P,s,t}^{\phi} \mathbf{X}_t) \quad (6a)$$

$$\text{s.t. } \text{Tr}(\Phi_{P,n,t}^{\phi} \mathbf{X}_t) + P_{L,n,t}^{\phi} + \sum_{d \in \mathcal{D}_s^{\phi}} \bar{P}_{d,s,t}^{\phi} = 0, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_n, \forall n \in \mathcal{N} \setminus \mathcal{S} \quad (6b)$$

$$\text{Tr}(\Phi_{Q,n,t}^{\phi} \mathbf{X}_t) + Q_{L,n,t}^{\phi} - y_{C,n}^{\phi} \text{Tr}(\Phi_{V,n,t}^{\phi} \mathbf{X}_t) = 0, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_n, \forall n \in \mathcal{N} \setminus \mathcal{S} \quad (6c)$$

$$P_{G,s}^{\min} \leq \text{Tr}(\Phi_{P,s,t}^{\phi} \mathbf{X}_t) + P_{L,s,t}^{\phi} + \sum_{d \in \mathcal{D}_s^{\phi}} \bar{P}_{d,s,t}^{\phi} \leq P_{G,s}^{\max}, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_s, \forall s \in \mathcal{S} \quad (6d)$$

$$Q_{G,s}^{\min} \leq \text{Tr}(\Phi_{Q,s,t}^{\phi} \mathbf{X}_t) + Q_{L,s,t}^{\phi} \leq Q_{G,s}^{\max}, \quad \forall t \in \mathcal{I}, \phi \in \mathcal{P}_s, \forall s \in \mathcal{S} \quad (6e)$$

$$(V_n^{\min})^2 \leq \text{Tr}(\Phi_{V,n,t}^{\phi} \mathbf{X}_t) \leq (V_n^{\max})^2, \quad \forall \phi, \forall n \in \mathcal{N} \quad (6f)$$

$$\sum_{t \in \mathcal{I}_{d,n}^{\phi}} \bar{P}_{d,n,t}^{\phi} \Delta_t = E_{d,n}^{\phi}, \quad \forall d \in \mathcal{D}_n^{\phi}, \phi \in \mathcal{P}_n, n \in \mathcal{N} \quad (6g)$$

$$0 \leq \bar{P}_{d,n,t}^{\phi} \leq \bar{P}_{d,n}^{\max}, \quad \forall t \in \mathcal{I}, d \in \mathcal{D}_n^{\phi}, n \in \mathcal{N} \quad (6h)$$

$$\text{rank}(\mathbf{X}_t) = 1, \quad \forall t \in \mathcal{I} \quad (6i)$$

$$\mathbf{X}_t \succeq \mathbf{0}, [\mathbf{X}_t]_{\mathcal{P}_0, \mathcal{P}_0} = \mathbf{1}_{3 \times 3}, \quad \forall t \in \mathcal{I}. \quad (6j)$$

Unfortunately, (P2) is still nonconvex because of the rank-1 constraint on the positive semi-definite matrices $\{\mathbf{X}_t\}$. Nevertheless, (P2) is amenable to the SDP relaxation technique, which amounts to dropping the rank constraints, thus relaxing nonconvex problems to SDP ones; see e.g., the tutorial [17], and the works in [20] and [11], where this technique is employed for power system state estimation and OPF for power transmission systems, respectively. Leveraging the SDP relaxation technique here too, it is possible to obtain the following *convex* relaxation of (P2):

$$(P3) \quad \min_{\{\mathbf{X}_t\}, \mathcal{V}_d} \sum_{t \in \mathcal{I}} \kappa_{0,t} \sum_{\phi \in \mathcal{P}_0} \text{Tr}(\Phi_{P,0,t}^{\phi} \mathbf{X}_t) + \sum_{t \in \mathcal{I}} \sum_{s \in \mathcal{S}} c_{s,t} \sum_{\phi \in \mathcal{P}_s} \text{Tr}(\Phi_{P,s,t}^{\phi} \mathbf{X}_t) \quad (7a)$$

$$\text{s.t. } \mathbf{X}_t \succeq \mathbf{0}, [\mathbf{X}_t]_{\mathcal{P}_0, \mathcal{P}_0} = \mathbf{1}_{3 \times 3}, \text{ and (6b) – (6h)}.$$

Clearly, if all the optimal matrices $\{\mathbf{X}_t^{\text{opt}}\}$ of (P3) have rank 1, then the variables $\{\mathbf{X}_t^{\text{opt}}\}, \mathcal{V}_d^{\text{opt}}$ represent a globally optimal solution also for (P2). Further, since (P1) and (P2) are *equivalent*, there exist $2|\mathcal{I}|$ vectors $\{\mathbf{x}_t^{\text{opt}}\}$ and $\{\mathbf{v}_t^{\text{opt}}\}$, with $\mathbf{X}_t^{\text{opt}} = \mathbf{x}_t^{\text{opt}} \mathbf{x}_t^{\text{opt}H}$ and $\mathbf{v}_t^{\text{opt}} := \mathbf{a}_{0,t} \circ \mathbf{x}_t^{\text{opt}}$, for all $t \in \mathcal{I}$, such that the optimal objective functions of (P1) and (P2) coincide. This is formally summarized next.

Proposition 1: Let $\{\mathbf{X}_t^{\text{opt}}\}, \mathcal{V}_d^{\text{opt}}$ be the optimal solution of (P3), and assume that $\text{rank}(\mathbf{X}_t^{\text{opt}}) = 1$, for all $t \in \mathcal{I}$. Then, a globally optimal solution of (P1) is given by $\mathcal{V}_d^{\text{opt}}$, the vectors of complex line-to-ground voltages

$$\mathbf{v}_t^{\text{opt}} := \sqrt{\lambda_{1,t}} \mathbf{D}_{0,t} \mathbf{u}_{1,t}, \quad \forall t \in \mathcal{I} \quad (8)$$

where $\lambda_{1,t} \in \mathbb{R}^+$ is the unique non-zero eigenvalue of $\mathbf{X}_t^{\text{opt}}$ and $\mathbf{u}_{1,t}$ the corresponding eigenvector, and the supplied active and reactive powers

$$P_{G,s,t}^{\text{opt}} = \text{Tr}(\Phi_{P,s,t}^{\phi} \mathbf{v}_t^{\text{opt}} \mathbf{v}_t^{\text{opt}\mathcal{H}}) + P_{L,s,t}^{\phi} + \sum_{d \in \mathcal{D}_s^{\phi}} \bar{P}_{d,s,t}^{\phi,\text{opt}} \quad (9)$$

$$P_{Q,s,t}^{\text{opt}} = \text{Tr}(\Phi_{Q,s,t}^{\phi} \mathbf{v}_t^{\text{opt}} \mathbf{v}_t^{\text{opt}\mathcal{H}}) + Q_{L,s,t}^{\phi}, \forall s \in \mathcal{S} \cup \{0\}. \quad (10)$$

The upshot of the proposed formulation is that the *globally* optimal solution of (P2) (and hence (P1)) can be obtained via standard interior-point solvers, in *polynomial-time* complexity; see, for example, the complexity bounds for SDP reported in [21, Ch. 4] and [17]. This is in contrast with gradient descent-based solvers for nonconvex programs, sequential quadratic programming, and particle swarm optimization, which in general do not guarantee global optimality of the obtained solutions, face challenges pertaining to sensitivity of the initial guess, convergence, and complexity which increases with the number of iterations. Notice also, that matrices $\{\Phi_{P,n,t}^{\phi}, \Phi_{Q,n,t}^{\phi}, \Phi_{V,n}^{\phi}\}$ are very sparse. This property can be leveraged to substantially reduce the computational burden of interior-point solvers; for instance, the so-called ‘‘chordal’’ structure of matrices $\{\mathbf{X}_t\}$ can be effectively exploited, as advocated in [22].

Since (P3) is a relaxed version of (P2), matrices $\mathbf{X}_t^{\text{opt}}$ could have rank greater than 1. In this case, rank reduction techniques can be employed to find a feasible rank-1 approximation of $\mathbf{X}_t^{\text{opt}}$ (see [17] and references therein). The resultant solution is feasible for (P2), but generally suboptimal [17]. Notably, when *balanced* distribution networks are considered, [12] established conditions on the voltage angles and the reactive power injections under which rank-1 matrices are *always* obtained provided the non-relaxed problem is feasible. Derivation of similar conditions in the present context constitutes an interesting future research direction, that will naturally complement the result in [12].

A. Feeders with two- and single-phase lines

For feeders with two- and single-phase laterals and sub-laterals, the dimensions of matrix $\mathbf{Y}$ have to be adjusted to $\sum_{n=0}^N |\mathcal{P}_n| \times \sum_{n=0}^N |\mathcal{P}_n|$, and its entries have to be as follows:

- i) matrix $-\mathbf{Z}_{nm}^{-1}$ occupies the $|\mathcal{P}_{mn}| \times |\mathcal{P}_{mn}|$ off-diagonal block corresponding to line $(m, n) \in \mathcal{E}$; and,
- ii) the $|\mathcal{P}_n| \times |\mathcal{P}_n|$ diagonal block corresponding to node $n \in \mathcal{N} \cup \{0\}$ is obtained as

$$[\mathbf{Y}]_{\mathcal{P}_n, \mathcal{P}_n} := \sum_{m \in \mathcal{N}_{mn}} \left(\frac{1}{2} \tilde{\mathbf{Y}}_{mn}^{(s)} + \tilde{\mathbf{Z}}_{mn}^{-1} \right) \quad (11)$$

where $\tilde{\mathbf{Z}}_{mn} = \mathbf{Z}_{mn}$ and $\tilde{\mathbf{Y}}_{mn}^{(s)} = \mathbf{Y}_{mn}^{(s)}$ if $\mathcal{P}_n = \mathcal{P}_{mn}$, otherwise $[\tilde{\mathbf{Z}}_{mn}]_{\mathcal{P}_{nm}, \mathcal{P}_{nm}} = \mathbf{Z}_{mn}$ and $[\tilde{\mathbf{Z}}_{mn}]_{\mathcal{P}_n \setminus \mathcal{P}_{nm}, \mathcal{P}_n \setminus \mathcal{P}_{nm}} = 0$ ($\tilde{\mathbf{Y}}_{mn}^{(s)}$ is computed likewise). Re-defining the $\sum_{n=0}^N |\mathcal{P}_n| \times 1$ vectors collecting voltages and currents as $\mathbf{v}_t' := [\mathbf{v}_{0,t}^T, [\mathbf{v}_{1,t}]_{\mathcal{P}_1}^T, \dots, [\mathbf{v}_{N,t}]_{\mathcal{P}_N}^T]^T$ and $\mathbf{i}_t' := [\mathbf{i}_{0,t}^T, [\mathbf{i}_{1,t}]_{\mathcal{P}_1}^T, \dots, [\mathbf{i}_{N,t}]_{\mathcal{P}_N}^T]^T$, respectively, (1) can be re-written again in vector-matrix form as $\mathbf{i}_t' = \mathbf{Y} \mathbf{v}_t'$, for all $t \in \mathcal{I}$, and the procedure (4)–(6) can be readily followed.

IV. FEASIBLE VOLTAGE PROFILE

To effect voltage regulation, and avoid abrupt voltage drops, constraints on the minimum and maximum utilization and service voltages were imposed in (P1). Constraints (2f) however, may challenge the feasibility of (P1), since it may not be possible to meet the minimum (maximum) utilization and service voltage requirements when feeders are heavily stressed and DG units supply a substantial amount of power. It is thus of prime importance to perform preemptive analysis of the feasible voltage profile in order to unveil possible infeasibility of (P1) and, in case, facilitate corrective actions. To this end, consider solving the following optimization problem

$$(P4) \min_{\mathbf{V}^{(1)}, \mathbf{V}_d} (1 - w_V) \sum_{t \in \mathcal{I}} \sum_{n \in \mathcal{N}} \sum_{\phi \in \mathcal{P}_n} \left(|V_{n,t}^{\phi}|^2 - |V_n^{\text{ref}}|^2 \right)^2 + w_V \sum_{t \in \mathcal{I}} \left(\kappa_{0,t} \sum_{\phi \in \mathcal{P}_0} P_{0,t}^{\phi} + \sum_{s \in \mathcal{S}} c_{s,t} \sum_{\phi \in \mathcal{P}_s} P_{G,s,t}^{\phi} \right) \quad (12a)$$

s.t. (2b) – (2e), and (2g) – (2h)

with $w_V \in (0, 1)$ denoting a weighting coefficient, and $|V_n^{\text{ref}}|$ the prescribed voltage magnitude of the feeder (e.g., $|V_n^{\text{ref}}| = 1$ p.u.). Although constraints (2f) are not present in (P4), the first term in (12a) promotes regulation by penalizing voltage magnitudes that deviate from the nominal ones.

Similar to (P1), problem (12) is nonconvex. However, by exploiting again Lemma 1, along with the SDP relaxation technique, the following convex problem is obtained

$$(P5) \min_{\substack{\{\mathbf{X}_t\}, \mathbf{V}_d \\ \{\alpha_{n,t}^{\phi}\}}} (1 - w_V) \sum_{t,n,\phi} \alpha_{n,t}^{\phi} + w_V \sum_{t \in \mathcal{I}} \kappa_{0,t} \sum_{\phi \in \mathcal{P}_0} \text{Tr}(\Phi_{P,0,t}^{\phi} \mathbf{X}_t) + w_V \sum_{t \in \mathcal{I}} \sum_{s \in \mathcal{S}} c_{s,t} \sum_{\phi \in \mathcal{P}_s} \text{Tr}(\Phi_{P,s,t}^{\phi} \mathbf{X}_t) \quad (13a)$$

s.t.

$$\begin{bmatrix} -\alpha_{n,t}^{\phi} & \text{Tr}(\Phi_{V,n}^{\phi} \mathbf{X}_t) - |V_n^{\text{ref}}|^2 \\ \text{Tr}(\Phi_{V,n}^{\phi} \mathbf{X}_t) - |V_n^{\text{ref}}|^2 & -1 \end{bmatrix} \preceq \mathbf{0} \quad (13b)$$

$$\mathbf{X}_t \succeq \mathbf{0}, [\mathbf{X}_t]_{\mathcal{P}_0, \mathcal{P}_0} = \mathbf{1}_{3 \times 3}, \text{ and } (6b) - (6h)$$

where constraint (13b) is enforced for all nodes n , per phase ϕ , and time slot t . Notice that by using (5c) the first term in (12a) becomes quadratic in $\{\mathbf{X}_t\}$. To bypass this hurdle, the non-negative real variables $\{\alpha_{n,t}^{\phi}\}$ are introduced to upper bound each term $(\text{Tr}(\Phi_{V,n}^{\phi} \mathbf{X}_t) - |V_n^{\text{ref}}|^2)^2$, and the Schur's complement is subsequently employed to obtain (13b). If for a given w_V , all matrices $\{\mathbf{X}_t\}$ have rank 1, then the optimal solution of (P5) is also a globally optimal solution of (P4) (see Proposition 1).

Clearly, if the voltages $\{V_{n,t}^{\phi,\text{opt}}\}$ obtained from (P5) satisfy $(V_{n,t}^{\text{min}})^2 \leq |V_{n,t}^{\phi,\text{opt}}|^2 \leq (V_{n,t}^{\text{max}})^2$, for all t, n, ϕ , then it is possible to proceed with the solution of the economic dispatch problem (P3). On the other hand, if some of the voltage magnitudes largely deviate from $|V_n^{\text{ref}}|$, corrective actions have to be taken; these include, for example, switching the taps

of controllable capacitor banks, or curtailing portion(s) of the loads.

V. THERMAL AND QUALITY-OF-POWER CONSTRAINTS

A. Thermal constraints

High current magnitudes on the lines can have detrimental effects on both efficiency and reliability of the distribution network. From an economical perspective, an additional (real) power has to be drawn from the main grid, or, supplied by the DG units in order to compensate for the increased power dissipated on the distribution lines. On the other hand, conductors may overheat if stressed by high currents over a prolonged time interval, and may eventually fail. This, in turn, would trigger an outage event, with consequent interruption of the power delivery in portions of the feeder.

To alleviate these concerns, it is of interest to constrain either the power dissipated on the conductors, or, the magnitude of currents flowing through the distribution lines [12], which amounts to adding one of the following constraints in (P1):

$$|I_{mn,t}^\phi| \leq I_{mn}^{\max} \quad (14)$$

$$P_{mn}^\phi := |I_{mn}^\phi|^2 \Re\{\mathbf{Z}_{mn}\}_{\{\phi\},\{\phi\}} \leq P_{mn}^{\max} \quad (15)$$

where $I_{mn,t}^\phi$ and P_{mn}^ϕ denote the current flowing on the phase ϕ of line $(m,n) \in \mathcal{E}$, and the active power lost on the same line and phase, respectively.

An SDP-consistent re-formulation of (14)–(15) has to be derived in order to accommodate the aforementioned constraints in (P2) and (P3). To this end, let $\mathbf{i}_{mn,t} := [\{I_{mn,t}^\phi\}]^T$ denote the $|\mathcal{P}_{mn}| \times 1$ vector collecting the complex currents flowing through line $(m,n) \in \mathcal{E}$, which is related to the line-to-ground voltages $\mathbf{v}_{n,t}$ and $\mathbf{v}_{n,t}$ as (cf. (1))

$$\mathbf{i}_{mn,t} = \mathbf{Z}_{mn}^{-1} ([\mathbf{v}_{m,t}]_{\mathcal{P}_{mn}} - [\mathbf{v}_{n,t}]_{\mathcal{P}_{mn}}). \quad (16)$$

Notice that since $\mathbf{Z}_{mn}^{-1}$ is generally not diagonal [23], (16) captures also current components arising from mutual inductive reactances and capacitive coefficients. Define the $|\mathcal{P}_{mn}| \times \sum_{n=0}^N |\mathcal{P}_n|$ complex matrix

$$\mathbf{B}_{mn} := [\mathbf{0}_{|\mathcal{P}_{mn}| \times \sum_{n=0}^{m-1} |\mathcal{P}_n|}, \check{\mathbf{Z}}_{mn}^m, \dots, \mathbf{0}_{|\mathcal{P}_{mn}| \times \sum_{n=m+1}^{N-1} |\mathcal{P}_n|}, \check{\mathbf{Z}}_{mn}^n, \mathbf{0}_{|\mathcal{P}_{mn}| \times \sum_{n=N+1}^N |\mathcal{P}_n|}] \quad (17)$$

where $\check{\mathbf{Z}}_{mn}^m$ is a $|\mathcal{P}_{mn}| \times |\mathcal{P}_m|$ matrix with elements $[\check{\mathbf{Z}}_{mn}^m]_{\mathcal{P}_{mn}, \mathcal{P}_m} = \mathbf{Z}_{mn}^{-1}$ and $[\check{\mathbf{Z}}_{mn}^m]_{\mathcal{P}_{mn}, \mathcal{P}_m \setminus \mathcal{P}_{mn}} = \mathbf{0}$; likewise, $\check{\mathbf{Z}}_{mn}^n$ has dimensions $|\mathcal{P}_{mn}| \times |\mathcal{P}_n|$, and its entries are filled as $[\check{\mathbf{Z}}_{mn}^n]_{\mathcal{P}_{mn}, \mathcal{P}_n} = -\mathbf{Z}_{mn}^{-1}$ and $[\check{\mathbf{Z}}_{mn}^n]_{\mathcal{P}_{mn}, \mathcal{P}_n \setminus \mathcal{P}_{mn}} = \mathbf{0}$. Thus, building on (16), an SDP-compliant re-formulation of (14)–(15) is provided in the following lemma.

Lemma 2: Consider the Hermitian matrix

$$\Phi_{I,mn,t}^\phi := \mathbf{D}_{0,t}^{\mathcal{H}} \mathbf{B}_{mn}^{\mathcal{H}} \mathbf{e}_{mn}^\phi (\mathbf{e}_{mn}^\phi)^\mathcal{T} \mathbf{B}_{mn} \mathbf{D}_{0,t} \quad (18)$$

where $\{\mathbf{e}_{mn}^\phi\}_{\phi \in \mathcal{P}_{mn}}$ denotes the canonical basis of $\mathbb{R}^{|\mathcal{P}_{mn}|}$. Then, constraints (14)–(15) can be expressed linearly in the outer-product $\mathbf{X}_t$ as

$$\text{Tr}\{\Phi_{I,mn,t}^\phi \mathbf{X}_t\} \leq I_{mn}^{\max} \quad (19)$$

$$\Re\{\text{Tr}\{\mathbf{e}_{mn}^\phi (\mathbf{e}_{mn}^\phi)^\mathcal{T} \mathbf{Z}_{mn}\}\} \text{Tr}\{\Phi_{I,mn,t}^\phi \mathbf{X}_t\} \leq P_{mn}^{\max}. \quad (20)$$

Proof. See the Appendix. $\square$

In distribution feeders, line outage events maybe triggered by overheating effects on the neutral cable(s), especially those experiencing highly unbalanced load conditions. Towards deriving constraints on the magnitude of neutral current(s), let $\mathcal{P}_{mn}^{(\varphi)}$ denote the set of grounded neutral cables that are present on the line $(m,n) \in \mathcal{E}$, and $\mathbf{T}_{mn}$ the $|\mathcal{P}_{mn}^{(\varphi)}| \times |\mathcal{P}_{mn}|$ neutral transformation matrix obtained from the primitive impedance matrix of the distribution line via Kron reduction [13, Sec. 4.1]. For example, the neutral transformation matrix of a four-wire grounded wye segment has dimensions 1×3 , while its dimensions increase to 3×3 for an underground wye line with three neutral conductors. Thus, the neutral currents $\mathbf{i}_{mn,t}^{(\varphi)} := [I_{mn,t}^{(1)}, \dots, I_{mn,t}^{(N^\varphi)}]^\mathcal{T}$ are linearly related to the line currents $\mathbf{i}_{mn,t}$ as [13, Sec. 4.1]

$$\mathbf{i}_{mn,t}^{(\varphi)} = \mathbf{T}_{mn} \mathbf{i}_{mn,t}. \quad (21)$$

It readily follows from (21) and the result of Lemma 2, that the magnitude of the current on the neutral cables can be constrained in the SDP problem (P3) as

$$\text{Tr}\{\Phi_{I,mn,t}^{(\varphi)} \mathbf{X}_t\} \leq I_{mn}^{(\varphi),\max}, \quad \forall \varphi \in \mathcal{P}_{mn}^{(\varphi)} \quad (22)$$

with

$$\Phi_{I,mn,t}^{(\varphi)} := \mathbf{D}_{0,t}^{\mathcal{H}} \mathbf{B}_{mn}^{\mathcal{H}} \mathbf{T}_{mn}^{\mathcal{H}} \mathbf{e}_{mn}^{(\varphi)} (\mathbf{e}_{mn}^{(\varphi)})^\mathcal{T} \mathbf{T}_{mn} \mathbf{B}_{mn} \mathbf{D}_{0,t} \quad (23)$$

where, as usual, $\{\mathbf{e}_{mn}^{(\varphi)}\}$ is the canonical basis of $\mathbb{R}^{|\mathcal{P}_{mn}^{(\varphi)}|}$.

There is an increasing concern on the thermal effects arising from harmonic currents in the neutral cable(s). In this case, constraints similar to (22) can be imposed on a per-harmonic basis (see, e.g. [9]).

B. Constraints on the power factor

The PF has been increasingly recognized as one of the principal measures of efficiency and reliability of power distribution networks [1], [24], [9]. High PF translates to lower generation and transmission costs, and enhanced protection of transmission lines from overheating (hence, higher resilience to line outages). Constraining the PF at the PCC is tantamount to limiting the reactive power exchanged with the main power grid. This, in turn, has two well-appreciated merits: i) it alleviates the power losses experienced along the backbone of the feeder [24]; and, ii) it limits the current drawn at the PCC, and therefore facilitates coexistence of multiple feeders on the same distribution line or substation without requiring components such as, e.g. conductors, transformers, and switchgear of increased size.

Unfortunately, the definition of PF for an unbalanced polyphase system is not unique [25]. In this paper, a per-phase definition is adopted in order to limit the reactive power exchanged at the PCC on each phase. Intuitively, polyphase variants [25] may induce high discrepancies between the amount of reactive power exchanged per phase, but with a “good” polyphase PF nevertheless. Let $\eta_{0,t}^\phi \in [0, 1]$ denote the minimum PF required at the PCC on the phase $\phi \in \mathcal{P}_0$ at time

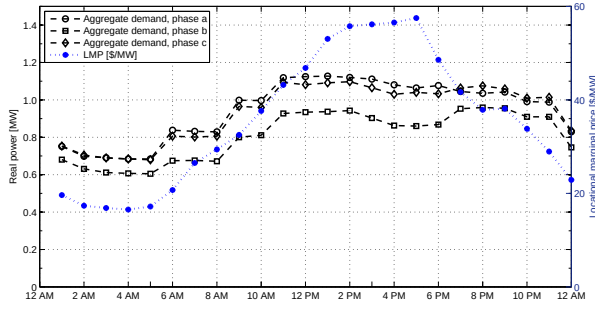
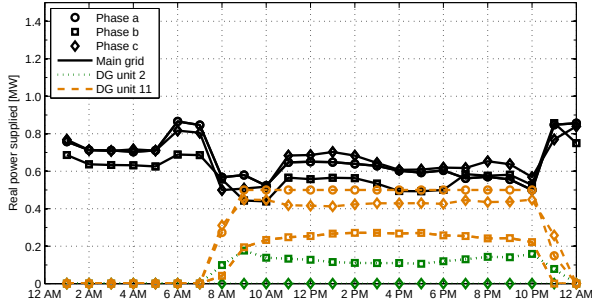
Fig. 2. Aggregate real load profile [MW], and prices $\{\kappa_{0,t}\}$ [\$/MW].

Fig. 3. Real power supplied [MW].

available in [23].

Before proceeding, it is worth mentioning that the rank of the matrices $\{\mathbf{X}_t^{\text{opt}}\}$ was *always* 1 in the experiments reported in this section. Therefore, the *globally* optimal solutions of (P1) were always attained. This illustrates clearly the merits of the proposed formulation.

Fig. 3 depicts the active power supplied by the DG units, and drawn from the main distribution grid. As expected, the DG units are heavily utilized from 8 AM to 11 PM, which is the interval where the price of power purchased from the main distribution grid is higher than 30 \$/MW. This, in turn, has the benefit of reducing the overall demand of the feeder during the peak hours (peak shaving). Notice however, that the DG units are not utilized at the maximum extent because of the constraint on the PF at the PCC [30], as it will be shown later on. The optimal allocation of the elastic energy demands is shown in Fig. 4. It is shown that the PHEVs connected at node 5' are charged from 2 AM to 5 AM, interval where both the LMPs and the non-deferrable loads are the lowest. A similar behavior is noticed for the elastic demands at node 9; in fact, they are entirely satisfied in the time slot [8 AM, 9 AM], which is the slot with the lowest LMP in the interval [8 AM, 4 PM].

Finally, Fig. 5 portrays the trajectories of the PF at the PCC. It can be seen that the lower bound on the PF is tightly met when the DG units are active. In fact, as they supply real power to a lagging power system, a reduction of the PF is inevitably experienced at the PCC. This can be further noticed from the dotted (orange) trajectories, which correspond to the case where (P3) is solved without the constraints on the PF. In this case, the majority of the real power is supplied by the DG units, thus entailing a significant drop of the PF at the PCC. The case where the DG units can operate at a variable PF,

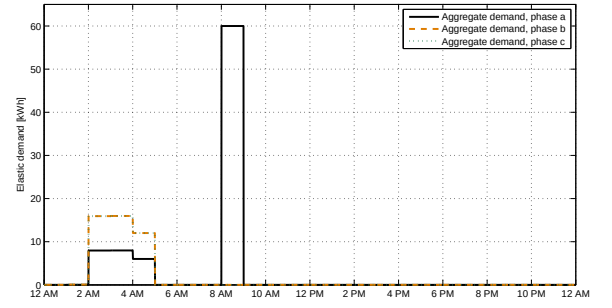


Fig. 4. Aggregate per-phase elastic demand [kWh].

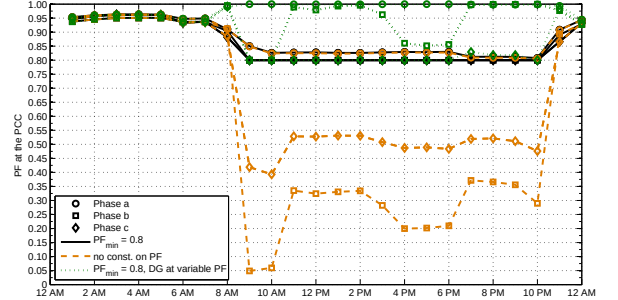


Fig. 5. PF at the substation.

from 0.5 to 1, is also considered. In this case, the DG units can supply a sufficiently amount of reactive power, so that the PF at the substation can be kept close to the unity most of the times. This suggests that DG units can be effectively utilized for providing reactive support [30], although an appropriate modeling of the cost incurred in this case is required.

VII. CONCLUDING REMARKS

The paper considered the economic dispatch problem for unbalanced three-phase power distribution networks, where the costs of power drawn from the main grid and supplied by the DG units over a given time horizon was minimized, while meeting the overall load demand and effecting voltage regulation. In spite of the inherent non-convexity of the formulated problem, the SDP relaxation technique was advocated to obtain a (relaxed) convex problem. As corroborated by numerical tests, the main merit of the proposed approach consists in offering the potential of finding the globally optimal solution of the original nonconvex economic dispatch problem.

APPENDIX

Proof of Lemma 1. To prove (5a), notice first that the injected apparent power at node n , phase ϕ and time t is given by $V_{n,t}^\phi (I_{n,t}^\phi)^* = (V_{n,t}^{\phi,*} I_{n,t}^\phi)^* = (\mathbf{v}_t^\mathcal{H} \bar{\mathbf{e}}_n^\phi (\bar{\mathbf{e}}_n^\phi)^\mathcal{H} \mathbf{i}_t)^\mathcal{H}$. Next, noticing that $\mathbf{v}_t = \mathbf{a}_{0,t} \circ \mathbf{x}_t = \mathbf{D}_{0,t} \mathbf{x}_t$ and using $\mathbf{i}_t = \mathbf{Y} \mathbf{v}_t$, it follows that $(\mathbf{v}_t^\mathcal{H} \bar{\mathbf{e}}_n^\phi (\bar{\mathbf{e}}_n^\phi)^\mathcal{H} \mathbf{i}_t)^\mathcal{H} = (\mathbf{x}_t^\mathcal{H} \mathbf{D}_{0,t}^\mathcal{H} \bar{\mathbf{e}}_n^\phi (\bar{\mathbf{e}}_n^\phi)^\mathcal{H} \mathbf{Y} \mathbf{D}_{0,t} \mathbf{x}_t)^\mathcal{H} = (\mathbf{x}_t^\mathcal{H} \mathbf{D}_{0,t}^\mathcal{H} \mathbf{Y}_n^\phi \mathbf{D}_{0,t} \mathbf{x}_t)^\mathcal{H} = \mathbf{x}_t^\mathcal{H} \mathbf{D}_{0,t}^\mathcal{H} (\mathbf{Y}_n^\phi)^\mathcal{H} \mathbf{D}_{0,t} \mathbf{x}_t$, which can be equivalently rewritten as $\text{Tr}(\mathbf{D}_{0,t}^\mathcal{H} \mathbf{Y}_n^\phi \mathbf{D}_{0,t} \mathbf{X}_t)$. Thus, the injected real and reactive powers can be obtained by using, respectively, the real and imaginary parts of $(\mathbf{Y}_n^\phi)^\mathcal{H}$. Finally, (5c) can be readily established by noticing that

$$|V_{n,t}^\phi|^2 = \mathbf{v}_t^H \bar{\mathbf{e}}_n^\phi (\bar{\mathbf{e}}_n^\phi)^T \mathbf{v}_t = \mathbf{x}_t^H \mathbf{D}_{0,t}^H \bar{\mathbf{e}}_n^\phi (\bar{\mathbf{e}}_n^\phi)^T \mathbf{D}_{0,t} \mathbf{x}_t = \text{Tr}(\mathbf{D}_{0,t}^H \bar{\mathbf{e}}_n^\phi (\bar{\mathbf{e}}_n^\phi)^T \mathbf{D}_{0,t} \mathbf{X}_t).$$

Proof of Lemma 2. From (16), and using the definitions of $\tilde{\mathbf{Z}}_{mn}^m$ and $\tilde{\mathbf{Z}}_{mn}^n$, it follows that $\mathbf{i}_{mn,t}^H \mathbf{i}_{mn,t}^H = \tilde{\mathbf{Z}}_{mn}^m \mathbf{v}_{m,t} \mathbf{v}_{m,t}^H \tilde{\mathbf{Z}}_{mn}^m + \tilde{\mathbf{Z}}_{mn}^n \mathbf{v}_{n,t} \mathbf{v}_{n,t}^H \tilde{\mathbf{Z}}_{mn}^n - \tilde{\mathbf{Z}}_{mn}^m \mathbf{v}_{m,t} \mathbf{v}_{n,t}^H \tilde{\mathbf{Z}}_{mn}^n - \tilde{\mathbf{Z}}_{mn}^n \mathbf{v}_{n,t} \mathbf{v}_{m,t}^H \tilde{\mathbf{Z}}_{mn}^m = \mathbf{B}_{mn} \mathbf{v}_t \mathbf{v}_t^H \mathbf{B}_{mn}^H$. Thus, $|I_{mn}^\phi|^2$ is given by $|I_{mn}^\phi|^2 = (\mathbf{e}_{mn}^\phi)^T \mathbf{B}_{mn} \mathbf{D}_{0,t} \mathbf{x}_t \mathbf{x}_t^H \mathbf{D}_{0,t}^H \mathbf{B}_{mn}^H \mathbf{e}_{mn}^\phi = \text{Tr}\{\mathbf{B}_{mn} \mathbf{D}_{0,t} \mathbf{X}_t \mathbf{D}_{0,t}^H \mathbf{B}_{mn}^H \mathbf{e}_{mn}^\phi (\mathbf{e}_{mn}^\phi)^T\} = \text{Tr}\{\Phi_{I,mn,t}^\phi \mathbf{X}_t\}$.

Proof of Lemma 4. After standard manipulations, (5c) can be re-written as $(P_{L,n,t}^\phi + Q_{L,n,t}^\phi - y_{C,n}^\phi \text{Tr}(\Phi_{V,n}^\phi \mathbf{X}_t))^2 \leq (P_{L,n,t}^\phi \eta_{n,t}^{-1})^2$, which is quadratic in $\mathbf{X}_t$. Then, (27) is readily obtained by using Schur's complement.

REFERENCES

- [1] J. A. Momoh, "Smart grid design for efficient and flexible power networks operation and control," in *Proc. on IEEE/PES Power Systems Conference and Exposition*, Seattle, WA, Mar. 2009.
- [2] H. M. Khodr, M. A. Matos, and J. Pereira, "Distribution optimal power flow," in *Proc. of IEEE Power Tech.*, Lausanne, Switzerland, Jul. 2007, pp. 1441–1446.
- [3] M. R. Irving and M. J. H. Sterling, "Efficient Newton-Raphson algorithm for load-flow calculation in transmission and distribution networks," *Proc. Inst. Elec. Eng. – Gener., Transm. Distrib.*, vol. 134, no. 5, pp. 325–330, Sept. 1987.
- [4] S. C. Tripathy, G. D. Prasad, O. P. Malik, and G. S. Hope, "Load-flow solutions for ill-conditioned power systems by a Newton-like method," *IEEE Trans. Power App. Syst.*, vol. PAS-101, no. 10, pp. 3648–3657, Oct. 1982.
- [5] R. G. Cespedes, "New method for the analysis of distribution networks," *IEEE Trans. on Power Del.*, vol. 5, no. 1, pp. 391–396, Jan. 1990.
- [6] F.-C. Lu and Y.-Y. Hsu, "Fuzzy dynamic programming approach to reactive power/voltage control in a distribution substation," *IEEE Trans. Power Syst.*, vol. 12, no. 2, pp. 681–688, May 1997.
- [7] E. Sortomme and M. A. El-Sharkawi, "Optimal power flow for a system of microgrids with controllable loads and battery storage," in *IEEE/PES Power Systems Conference and Exposition*, Seattle, WA, Mar. 2009.
- [8] K. Clement-Nyons, E. Haesen, and J. Driesen, "The impact of charging plug-in hybrid electric vehicles on a residential distribution grid," *IEEE Trans. Power Syst.*, vol. 25, no. 1, pp. 371–380, Feb. 2010.
- [9] D. Forner, T. Erseghe, S. Tomasin, and P. Tenti, "On efficient use of local sources in smart grids with power quality constraints," in *Proc. of IEEE Int. Conf. on Smart Grid Comm.*, Gaithersburg, MD, Oct. 2010, pp. 555–560.
- [10] X. Bai, H. Wei, K. Fujisawa, and Y. Wang, "Semidefinite programming for optimal power flow problems," *Int. J. of Electrical Power & Energy Systems*, vol. 30, no. 6–7, pp. 383–392, 2008.
- [11] J. Lavaei and S. H. Low, "Zero duality gap in optimal power flow problem," *IEEE Trans. Power Syst.*, vol. 1, no. 1, pp. 92–107, 2012.
- [12] A. Y. Lam, B. Zhang, A. Dominguez-Garcia, and D. Tse, "Optimal distributed voltage regulation in power distribution networks," 2012, [Online] Available at <http://arxiv.org/abs/1204.5226v1>.
- [13] W. H. Kersting, *Distribution System Modeling and Analysis*. 2nd ed., Boca Raton, FL: CRC Press, 2007.
- [14] S. Paudyal, C. A. Canizares, and K. Bhattacharya, "Optimal operation of distribution feeders in smart grids," *IEEE Trans. on Ind. Electron.*, vol. 58, no. 10, pp. 4495–4503, Oct. 2011.
- [15] S. Bruno, S. Lamonaca, G. Rotondo, U. Stecchi, and M. L. Scala, "Unbalanced three-phase optimal power flow for smart grids," *IEEE Trans. on Ind. Electron.*, vol. 58, no. 10, pp. 4504–4513, Oct. 2011.
- [16] M. Abdel-Akher, K. M. Nor, and A. H. A. Rashid, "Improved three-phase power-flow methods using sequence components," *IEEE Trans. Power Syst.*, vol. 20, no. 3, pp. 1389–1397, Aug. 2005.
- [17] Z.-Q. Luo, W.-K. Ma, A. M.-C. So, Y. Ye, and S. Zhang, "Semidefinite relaxation of quadratic optimization problems," *IEEE Sig. Proc. Mag.*, vol. 27, no. 3, pp. 20–34, May 2010.
- [18] D. Wu, D. C. Aliprantis, and L. Ying, "Load scheduling and dispatch for aggregators of plug-in electric vehicles," *IEEE Trans. on Smart Grid*, vol. 3, no. 1, pp. 368–376, Mar. 2012.
- [19] O. Sundström and C. Binding, "Flexible charging optimization for electric vehicles considering distribution grid constraints," *IEEE Trans. Smart Grid*, vol. 3, no. 1, pp. 26–37, Mar. 2012.
- [20] H. Zhu and G. B. Giannakis, "Estimating the state of AC power systems using semidefinite programming," in *Proc. of North American Power Symposium*, Boston, MA, Aug. 2011.
- [21] A. Ben-Tal and A. Nemirovski, "Lectures on modern convex optimization," 2012, class Notes Georgia Inst. Technol. [Online]. Available: www2.isye.gatech.edu/~nemirov/.
- [22] R. A. Jabr, "Exploiting sparsity in SDP relaxations of the OPF problem," *IEEE Trans. Power Syst.*, vol. 2, no. 27, pp. 1138–1139, May 2012.
- [23] W. H. Kersting, "Radial distribution test feeders," in *IEEE Power Engineering Society Winter Meeting*, vol. 2, 2001, pp. 908–912.
- [24] I. Roytelman and V. Ganesan, "Coordinated local and centralized control in distribution management systems," *IEEE Trans. on Power Del.*, vol. 15, no. 2, pp. 718–724, Apr. 2000.
- [25] A. E. Emanuel, "On the definition of power factor and apparent power in unbalanced polyphase circuits with sinusoidal voltage and currents," *IEEE Trans. on Power Del.*, vol. 8, no. 3, pp. 841–852, Jul. 1993.
- [26] M. Grant and S. Boyd, "CVX: Matlab software for disciplined convex programming," 2011, [Online]. Available: <http://cvxr.com/cvx/>.
- [27] J. F. Sturm, "Using SeDuMi 1.02, a Matlab toolbox for optimization over symmetric cones," *Optimization Methods Software*, vol. 11–12, no. 1, pp. 625–653, Aug. 1999, [Online]. Available: <http://sedumi.mcmaster.ca>.
- [28] R. Iravani, M. Graovac, and X. Wang, "Integration of storage in electrical distribution systems and its impact on the depth of penetration of DG," *Tech. Report*, [Online]. Available: <http://canmetenergy.nrcan.gc.ca/>.
- [29] [Online]. Available: <https://www.midwestiso.org>.
- [30] B. Kroposki, C. Pink, R. DeBlasio, H. Thomas, M. Simoes, and P. Sen, "Benefits of power electronic interfaces for distributed energy systems," *IEEE Trans. Energy Conversion*, vol. 25, no. 3, pp. 901–908, 2010.

Emiliano Dall'Anese (S'08, M'11) received the Laurea Triennale (B.Sc degree) and the Laurea Specialistica (M.Sc degree) in Telecommunications Engineering from the University of Padova, Italy, in 2005 and 2007, respectively, and the Ph.D in Information Engineering at the Department of Information Engineering (DEI), University of Padova, Italy, in 2011. From January 2009 to September 2010 he was a visiting scholar at the Department of Electrical and Computer Engineering, University of Minnesota, USA. He is currently a post-doctoral associate at the Department of Electrical and Computer Engineering, University of Minnesota, USA.

His research interests lie in the areas of signal processing, communications, and networking. Current research focuses on wireless cognitive networks, IP networks, and power distribution systems.

Georgios B. Giannakis (F'97) received his Diploma in Electrical Engr. from the Natl. Tech. Univ. of Athens, Greece, 1981. From 1982 to 1986 he was with the Univ. of Southern California (USC), where he received his MSc. in Electrical Engineering, 1983, MSc. in Mathematics, 1986, and Ph.D. in Electrical Engr., 1986. Since 1999 he has been a professor with the Univ. of Minnesota, where he now holds an ADC Chair in Wireless Telecommunications in the ECE Department, and serves as director of the Digital Technology Center.

His general interests span the areas of communications, networking and statistical signal processing - subjects on which he has published more than 300 journal papers, 500 conference papers, 20 book chapters, two edited books and two research monographs. Current research focuses on compressive sensing, cognitive radios, network coding, cross-layer designs, wireless sensors, social and power grid networks.

Bruce F. Wollenberg (M'67, SM'75, F'89, LF'08) graduated from Rensselaer Polytechnic Institute, Troy, NY, with a B.S.E.E. in 1964 and an M.Eng. in electric power engineering in 1966. He then attended the University of Pennsylvania, Philadelphia, PA, graduating with a Ph.D. in systems engineering in 1974. He worked for Leeds and Northrup Co. North Wales, PA from 1966 to 1974, Power Technologies Inc. Schenectady, NY from 1974 to 1984, and Control Data Corporation Energy Management System Division Plymouth, MN from 1984 to 1989. He took a position as a Professor of Electrical Engineering in the Electrical and Computer Engineering Department at the University of Minnesota in September 1989. He is presently the Director of the University of Minnesota Center for Electric Energy (UMCEE). His main research interests are the application of mathematical analysis to power system operation and planning problems. He is the co-author of the textbook *Power Generation Operation and Control* published by John Wiley & Sons.